


IX-T01 WiFi Firmware Update process

Equipment necessary for operating update process:

- One computer with both wireless and wire access capability
- IE, Firefox, Chrome or other internet browser
- One RJ-45 to RJ-45 cable.
- The IX-T01 Travel WiFi Router to be updated.

Steps to update firmware:

1. Press RESET button of IX-T01 WiFi over 6 seconds. The indicators will turn off for 1 second after release the RESET button.
2. After 1 minute for IX-T01 WiFi getting ready, search the SSID of IX-T01 WiFi of default value Travel_WiFi-XXXX.
3. Connect to IX-T01 WiFi by WiFi and waiting for the IP (192.168.16.xxx) assign ready
4. Type http://192.168.16.254 in the URL line on the IE, Firefox, Chrome or other internet browser.
5. In Quick Setting Manu Press "Exit" icon to enter Advanced Setting Manu→ Select the Operation Mode in left menu to enter setting menu, select Bridge then confirm (please wait around 30 seconds)→ and then update the page · then check if Operation Mode is setting to Bridge

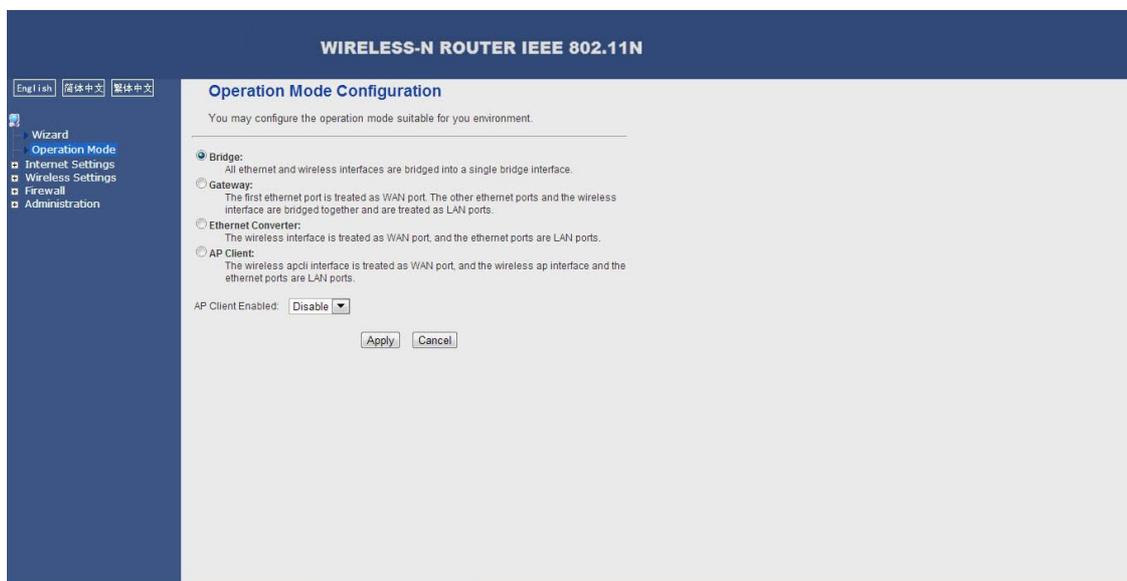


6. after confirm the mode is Bridge, please disconnect the wireless connection.


- 7. Use Cable to connect computer and IX-T01 WiFi
- 8. Select Administration in the left menu in Advanced Setting Menu , then choose Upload Firmware




- 9. Enter Upgrade Firmware Menu , please choose new firmware(innoXplore_20130423_230-3.img) in file link then confirm.

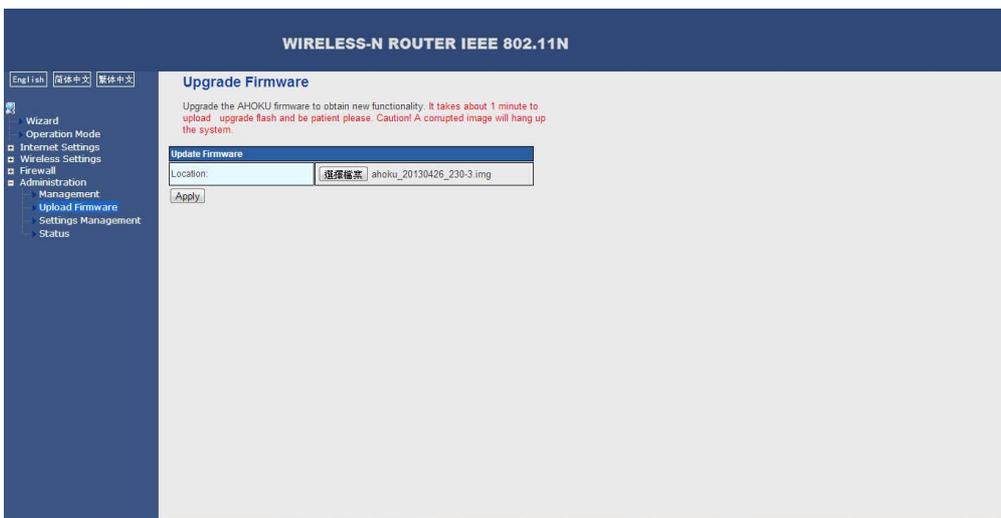

- 10. The upgrade process take 1 munites , the page will shown "Done...rebooting" after the upgrade process complete.

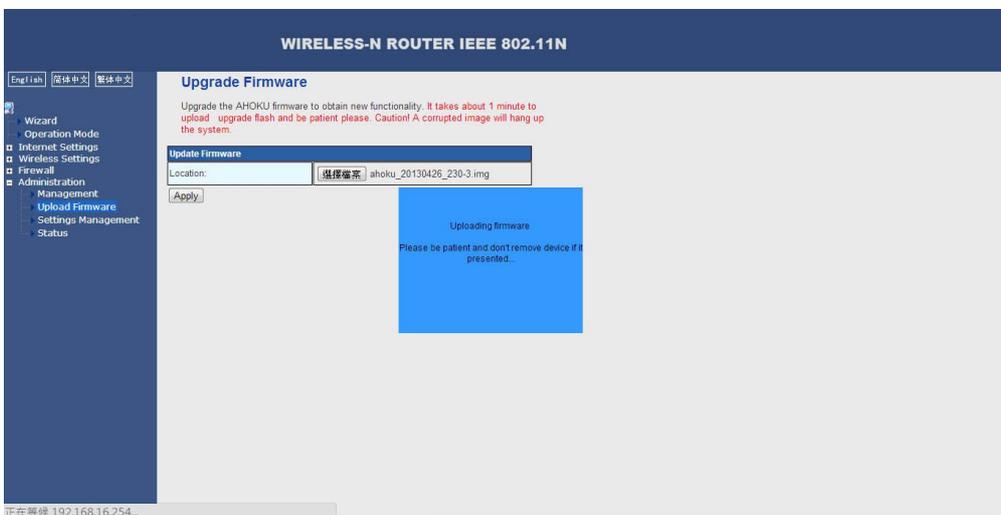

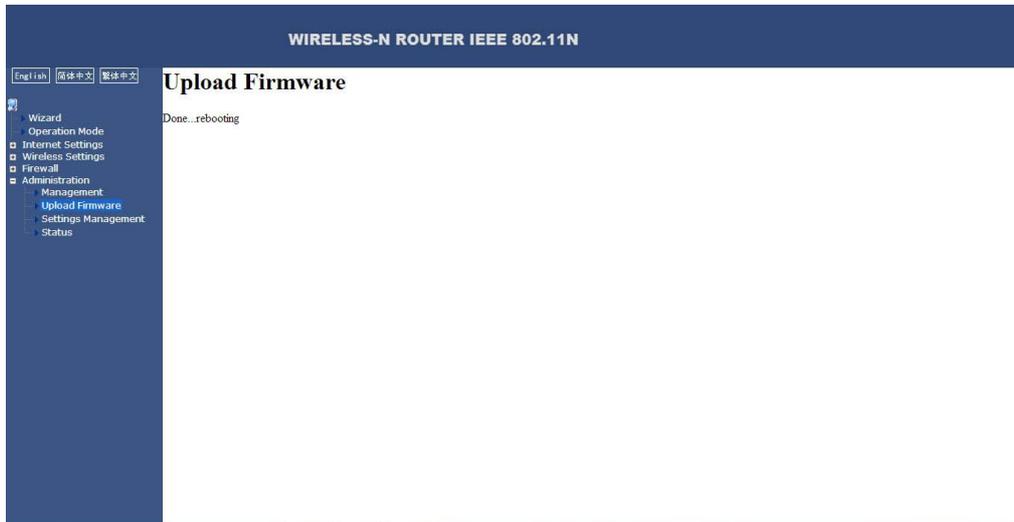

11. After upgrade please press RESET6 seconds to restart IX-T01 WiFi , after 1 minutes restart, we complete the firmware upgrade process.

Note

**if no show Done...rebooting, please redo the process 1 to 9.

**after firmware upgrade , when enter the IX-T01 WiFi 192.168.16.254 quick setting menu , please check the version shown on page.